



GEN-2000-IMM0

GEN-3000-IMM0

Power your sensitive equipment without worry with an inverter generator. They are smaller, lighter, quieter and more efficient than conventional generators and produce ultra-clean power in a form that can be used to charge smartphones, tablets, computers and medical devices.

Inverter Technology:

Reduced size, weight, noise and fuel consumption | Produces commercial quality AC power for sensitive electronic equipment

Alternator:

Total harmonic distortion (THD) less than 3% | Copper windings

Engine:

Low-oil shutdown | Recoil start

Frame:

Insulated side panels to reduce noise | Easy grip handle integrated into frame (Two handles on GEN-3000-IMM0) | Rear folding handle and two wheels for easy transport (GEN-3000-IMM0)

Components:

DC/battery charging | USB port for electronics | Idle control

Miscellaneous:

USDA/USFS-approved spark arrestors

Inverters 2000 & 3000-Watt

Portable Gasoline Generators

MODEL NO.	GEN-2000-IMMO	GEN-3000-IMMO
MAX. AC OUTPUT	2000 watts	3000 watts
RATED AC OUTPUT	1600 watts	2800 watts
DISPLACEMENT/ENGINE	79cc Mi-T-M OHV	212cc Mi-T-M OHV
ALTERNATOR	Copper windings	Copper windings
MAX. AMPS (120V)	16.7	25.0
CONT. AMPS (120V)	13.3	23.3
RECEPTACLES	(1) 120V, 20A duplex (1) 12V DC 8.0A	(1) 120V, 20A duplex (1) 120V, 30A twist lock (1) 12V DC 8.3A
MAIN CIRCUIT BREAKER	Yes	Yes
RATED SPEED	3600 RPM	3600 RPM
DECIBEL RATING	63.0	68.0
FUEL CAPACITY	1.1 gallons	1.9 gallons
RUN TIME (AT HALF LOAD)	6.0 hours	6.8 hours
DIMENSIONS (LxWxH)	19.6x11.4x18in.	23.8x17x19.4in.
SHIP WT.	53 lb.	90 lb.
NET WT.	48 lb.	84 lb.

Inverter generator ratings represent no-load sound levels. Noise level tested at seven meters (75% load). Rating represents minimum noise level rating.




GEN-2000-IMMO & GEN-3000-IMMO with parallel port box option, AW-5100-000


Accessories:

PART NUMBER	DESCRIPTION	FITS MODELS
AW-5100-0001	Parallel port box - Can be used on either inverter model or combination of both inverters. Includes a 30A, 120V outlet and a 20A, 120V duplex receptacle. The largest appliance that can be powered is 3600 watts - even with (2) GEN-3000-IMMO inverters. It is limited by the 30A outlet.	All models
AW-5100-0002	Parallel port box - Can be used on either inverter model or combination of both inverters. Includes a 50A, 120V outlet and a 20A, 120V duplex receptacle. The largest appliance that can be powered is 5600 watts - limited by the combined ratings of the machines connected.	All models

GEN-2000-IMMO Control Panel:

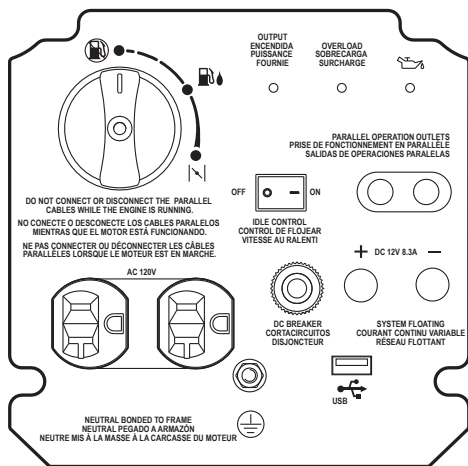

GEN-3000-IMMO Control Panel:

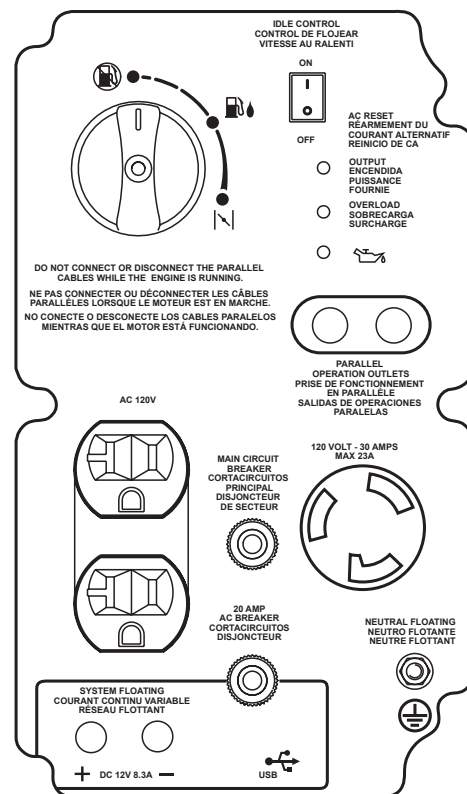

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.